

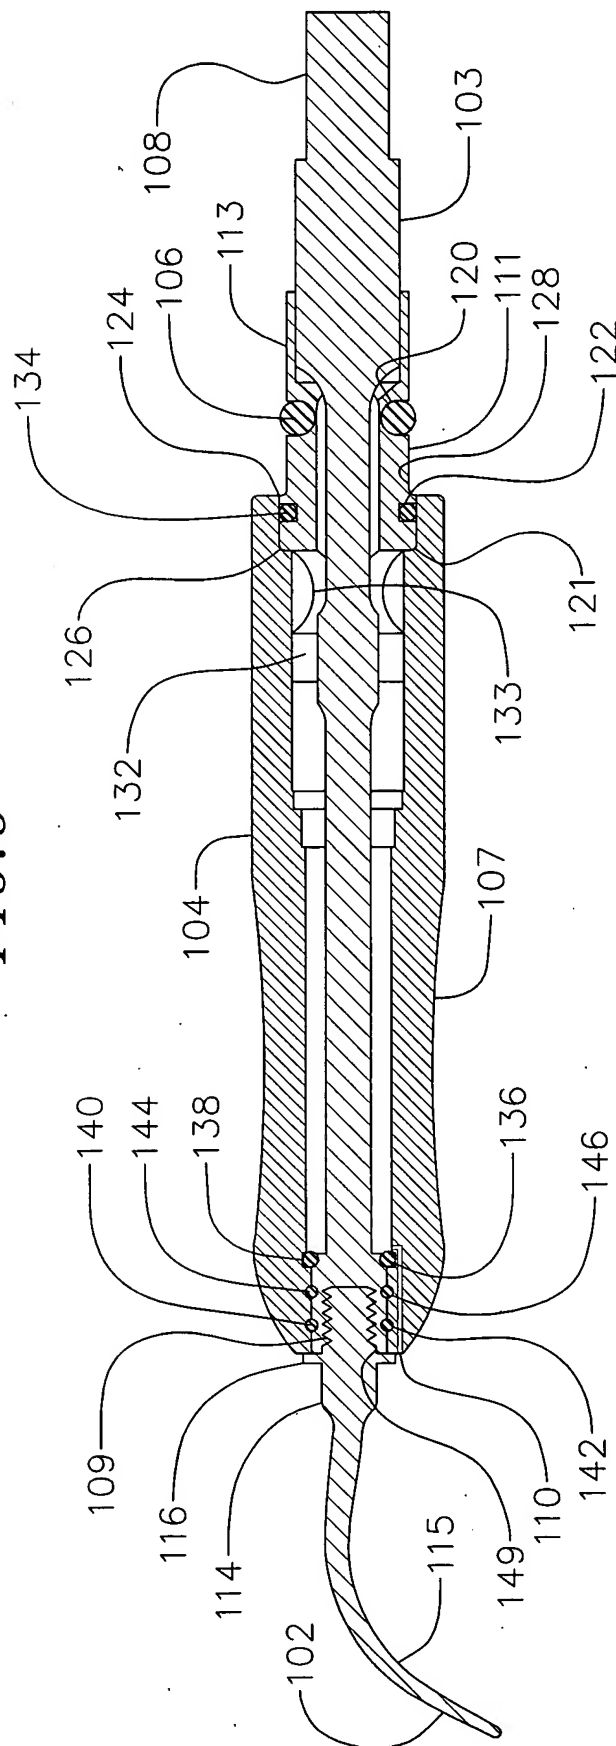
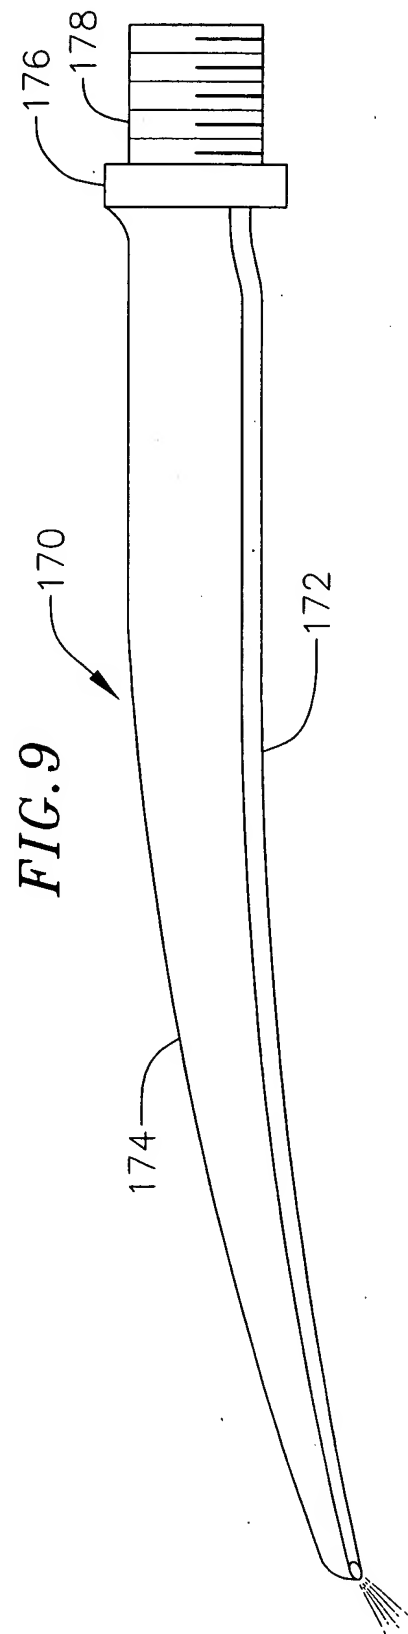


FIG. 6

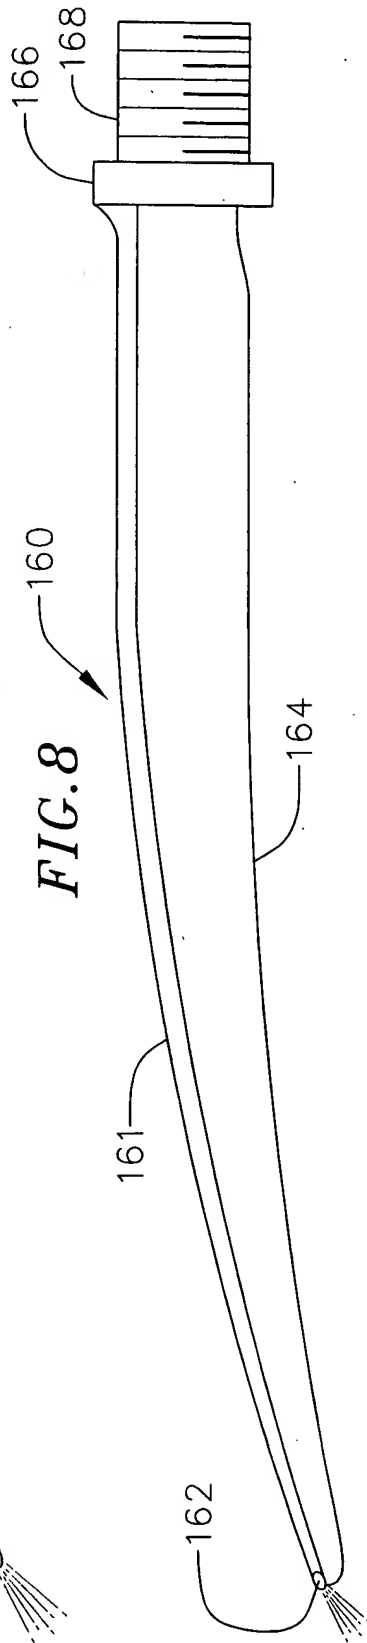

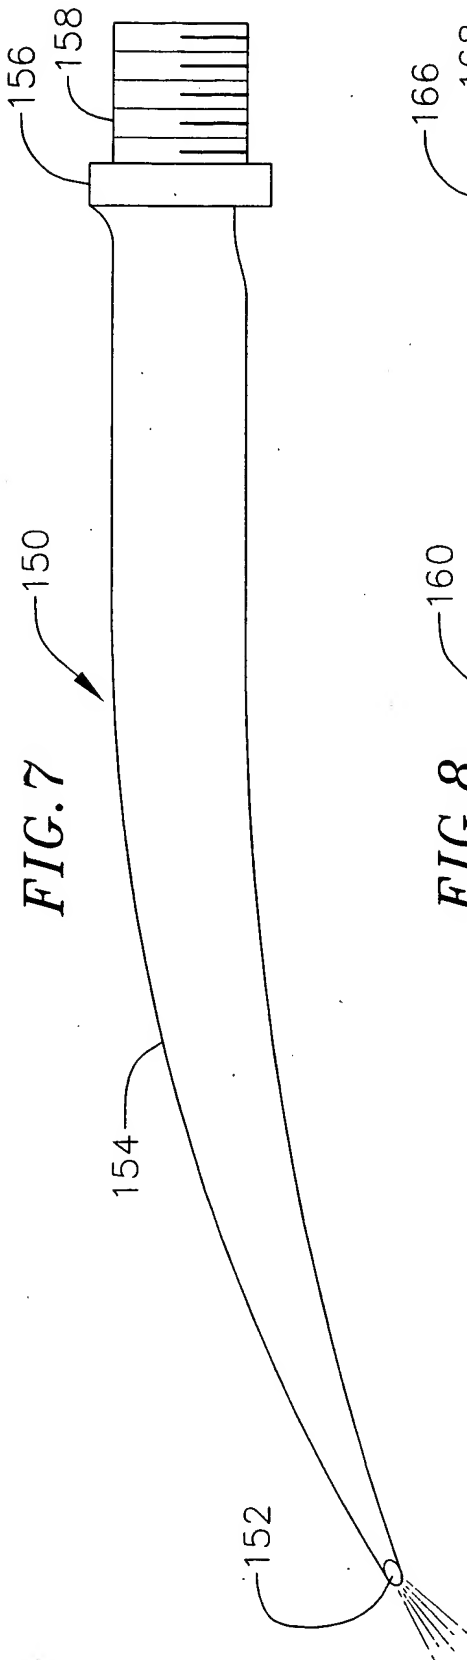

A perspective view of the device 200. The device includes a main body 205 with a handle 206 at one end and a nozzle assembly 207 at the other. The handle 206 has a series of longitudinal slots 208. The nozzle assembly 207 includes a nozzle 210 with a series of longitudinal slots 211. The device also features a trigger mechanism 212 located between the handle and the nozzle, which includes a trigger lever 214 and a trigger button 216. The trigger button 216 is positioned to be actuated by the user's thumb. The device is shown in a perspective view from above.